


F Series



Flexible Strips


F Series is specially designed for the high demanding conditions of the corporate image industry with long periods of usage, outdoor exposure and long lifespan.

Compatible with all Profiled technology connectors.

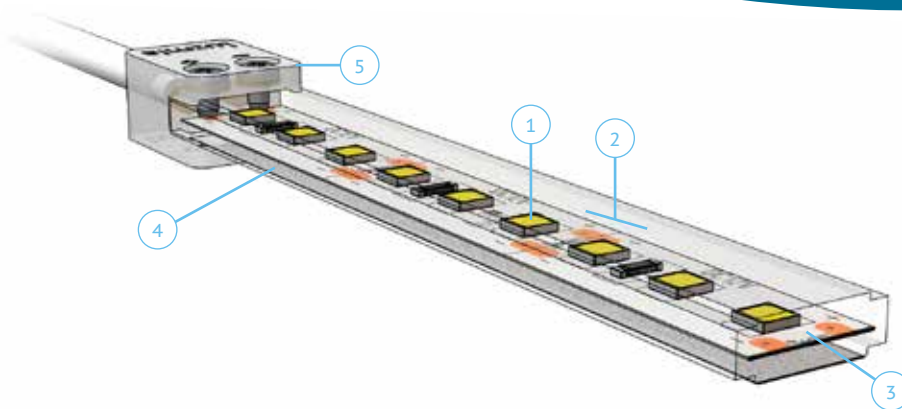


- 1. UniQBin & LowRunner Led Selection
- 2. IP68 Uniform Encapsulation
- 3. FPCB high dissipation and low voltage drop


- 4. 3M® Double-sided Tape
- 5. Profiled connection



F60



F120



F150



Light box



Channel letters



Halo letters




Cut lettering

4 years warranty



APPLICATIONS

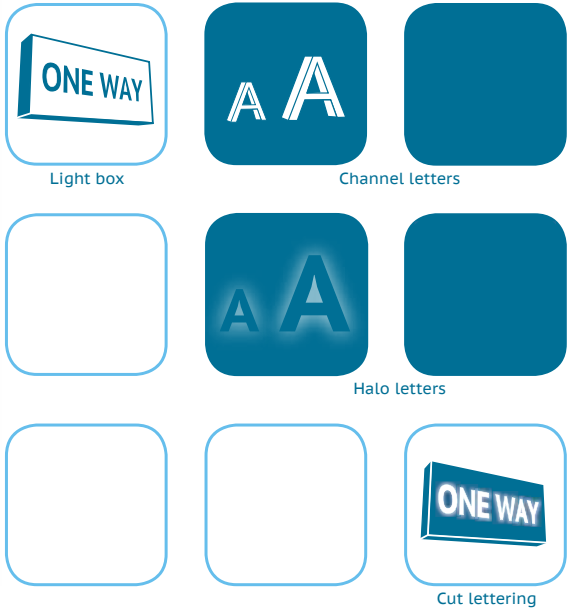


- Luminous flux 500 lm/m (PW)
- Power 5W/m (IP33) 6W/m (IP68)
- IP33 / IP68 Protection
- Beam Angle 120°
- Voltage DC 12V
- 60 led per meter
- Work temperature -40° ~ +70°

CODES TABLE

Code	Color	Code	Color	Code	Color
021310	Warm white	021313	Cold white	021316	Yellow
021311	Neutral white	021314	Red	021317	Green
021312	Pure white	021315	Orange	021318	Blue
IP 33					

Code	Color	Code	Color	Code	Color
021320	Warm white	021323	Cold white	021326	Yellow
021321	Neutral white	021324	Red	021327	Green
021322	Pure white	021325	Orange	021328	Blue
IP68					

*50/100 meters per roll, code for sale by meter

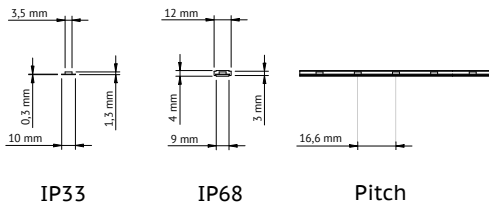

Profiled Connection

