


F Series




Flexible Strips

F Series is specially designed for the high demanding conditions of the corporate image industry with long periods of usage, outdoor exposure and long lifespan.


Compatible with all Profiled technology connectors.

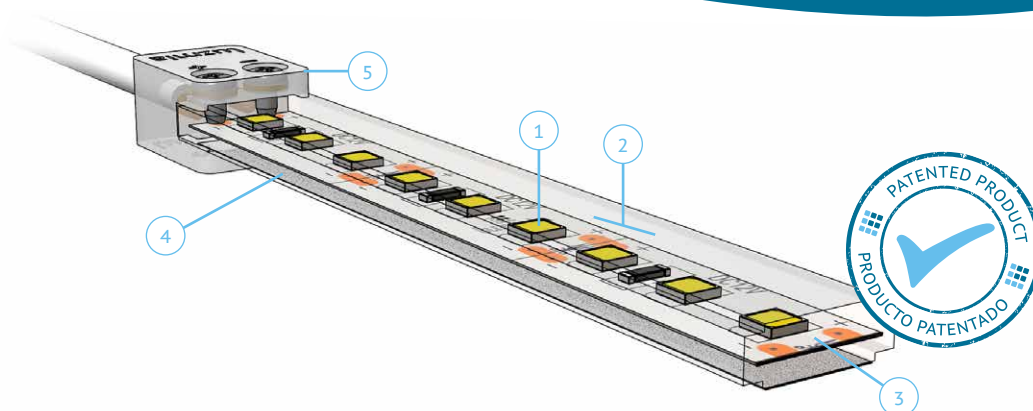

- | | |
|---|---------------------------------|
| 1. UniQBin & LowRunner LED Selection | 4. 3M® Double-sided Tape |
| 2. IP68 Uniform Encapsulation | 5. Profiled connection |
| 3. FPCB high dissipation and low voltage drop | 6. AC and DC versions available |



F60



F120



Light box



Channel letters



Halo letters



Cut lettering



APPLICATIONS



Light box



Channel letters



Halo Letters



Cut Lettering

- Luminous flux 1.000 lm/m (PW)
- 12W/m (IP66)
- IP66 Protection
- Beam Angle 120°
- AC 240V (120V under request)
- 120 LED per meter
- Work temperature -40° ~ +70°
- Dimmable & flickerless with PF > 0.9


CODES TABLE

AC 240V

Code	Color	Code	Color	Code	Color
022340	Warm white	022343	Cold white	022346	Yellow
022341	Neutral white	022344	Red	022347	Green
022342	Pure white	022345	Orange	022348	Blue
IP66					

*Cutting lenght = 100mm


*100 meters per roll, code for sale by meter

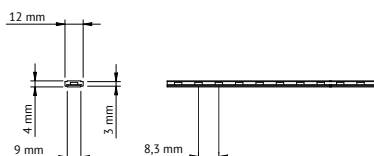

IP66

Pitch

Profiled Connection



120°

