


LX Series




Modules

LX series is designed for backlighting of channel letters and very thin light boxes, it optimizes life and optical properties to reduce the density of modules per square meter, which allows lighting of boxes with limited depth.

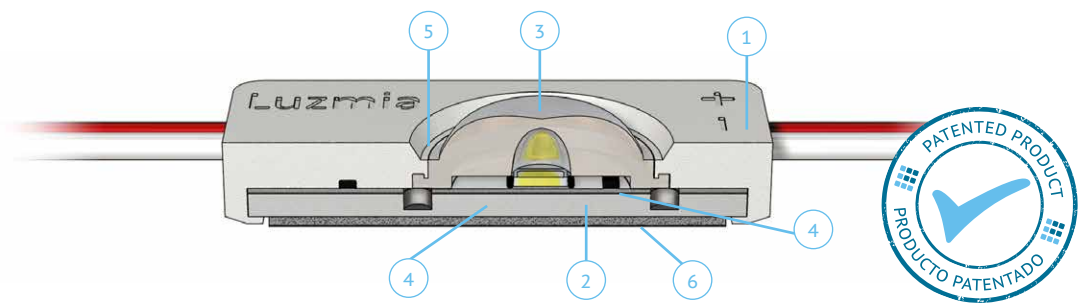

- | | |
|---------------------------|------------------------------|
| 1. ABS Encapsulation | 5. IP65 Protection |
| 2. High dissipation MCPCB | 6. 3M® Double-sided Tape VHB |
| 3. Beam Angle 160° | 7. Optimized low Nadir |
| 4. Current control | |



LX1600



Light box



Channel letters



Halo letters



Cut lettering

6 years
warranty

APPLICATIONS



Light box



Channel Letters



Halo Letters




Cut Lettering



- Luminous flux 140 lm (PW)
- Power 1,6 W
- Voltage DC 12V
- Beam Angle 160°
- IP65 Protection
- Current control
- 30 Modules per chain
- Work temperature -40° ~ +70°

CODES TABLE

Code	Color	Code	Color
025180	Warm white	025182	Pure white
025181	Neutral white	025183	Cold white

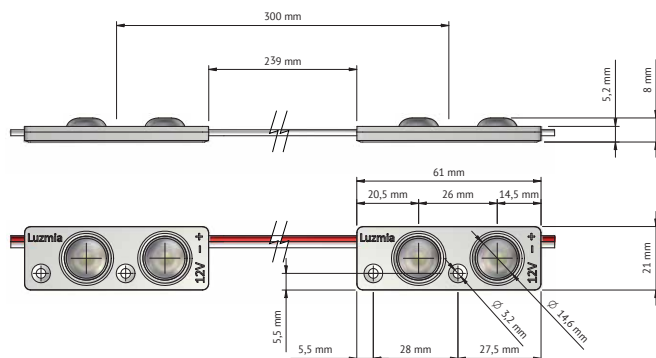

160°



EasyCon connection

