


F Series




Flexible Strips

F Series is specially designed for the high demanding conditions of the corporate image industry with long periods of usage, outdoor exposure and long lifespan.


Compatible with all Profiled technology connectors.

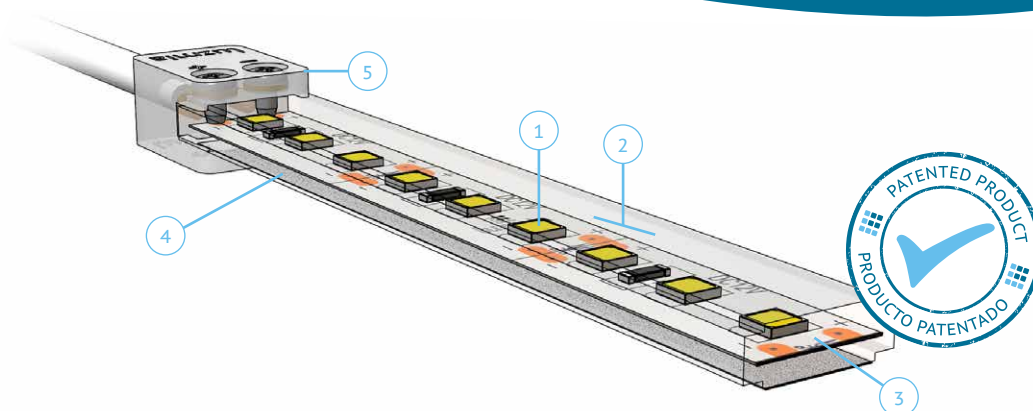

- 1. UniQBin & LowRunner LED Selection
- 2. IP68 Uniform Encapsulation
- 3. FPCB high dissipation and low voltage drop
- 4. 3M® Double-sided Tape
- 5. Profiled connection
- 6. AC and DC versions available



F60



F120



Light box



Channel letters



Halo letters



Cut lettering



APPLICATIONS



Light box



Channel letters



Halo letters



Cut Lettering

- Luminous flux 500 lm/m (PW)
- 6W/m (IP66)
- IP66 Protection
- Beam Angle 120°
- AC 240V (120V under request)
- 60 LED per meter
- Work temperature -40° ~ +70°
- Dimmable & flickerless with PF > 0.9


CODES TABLE

AC 240V

Code	Color	Code	Color	Code	Color
022320	Warm white	022323	Cold white	022326	Yellow
022321	Neutral white	022324	Red	022327	Green
022322	Pure white	022325	Orange	022328	Blue
IP66					

*Cutting lenght = 200mm


*100 meters per roll, code for sale by meter



IP66

Pitch

Profiled Connection



120°

